



# Configuration Space

CS 6301 Special Topics: Introduction to Robot Manipulation and Navigation

Professor Yu Xiang

The University of Texas at Dallas

# Robotics

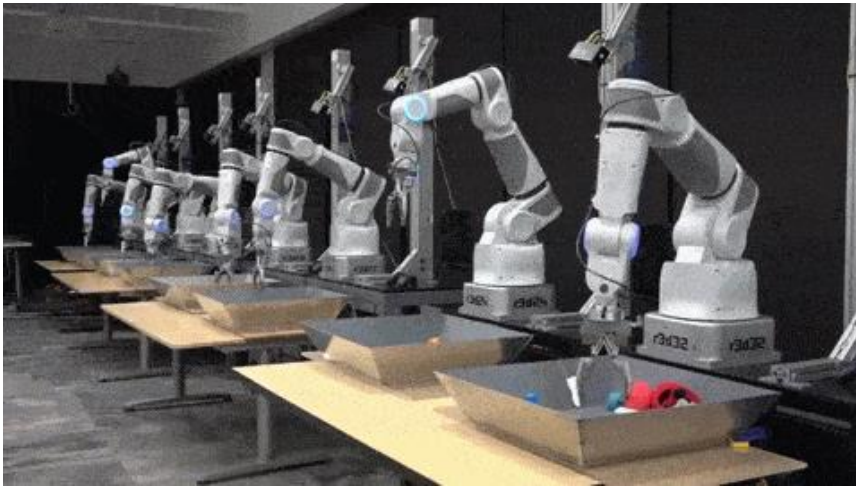
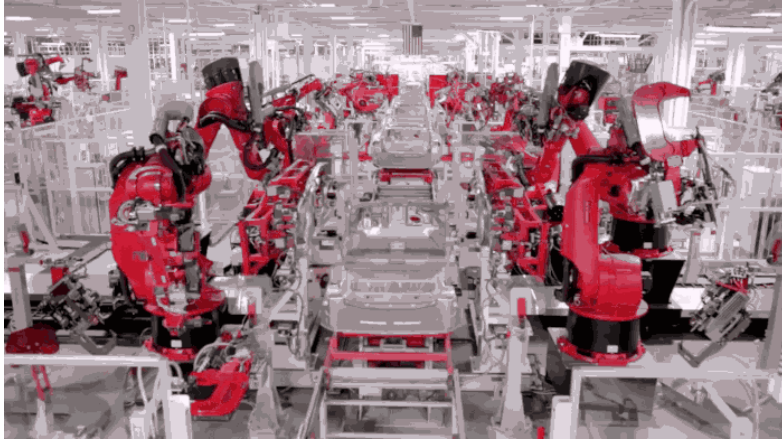


What is the common phenomenon in these robots?


Motion

# Robot Mechanisms

- Links and Joints

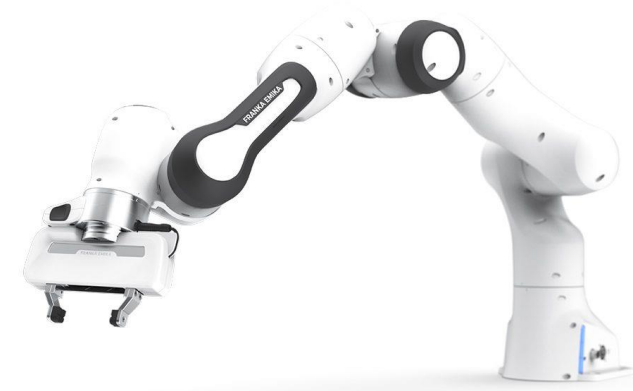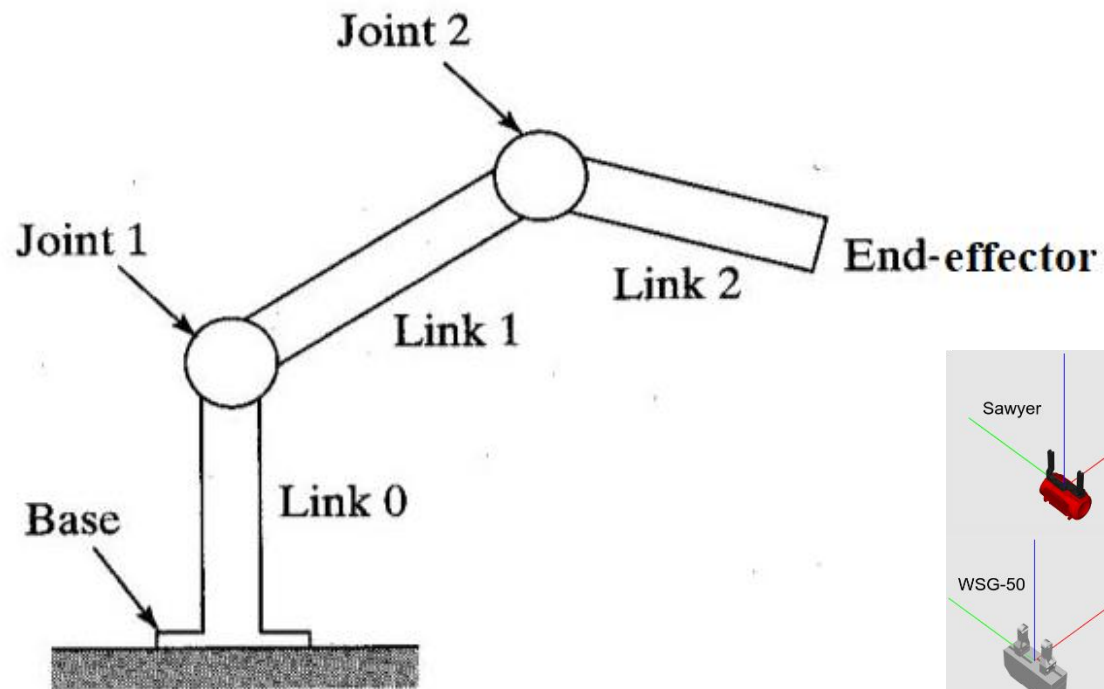


Franka Emika

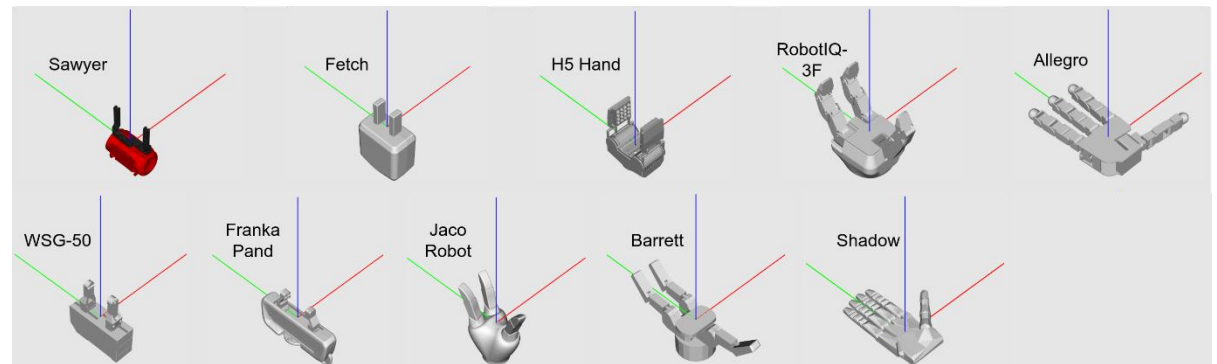


End-effectors

# Franka Movement

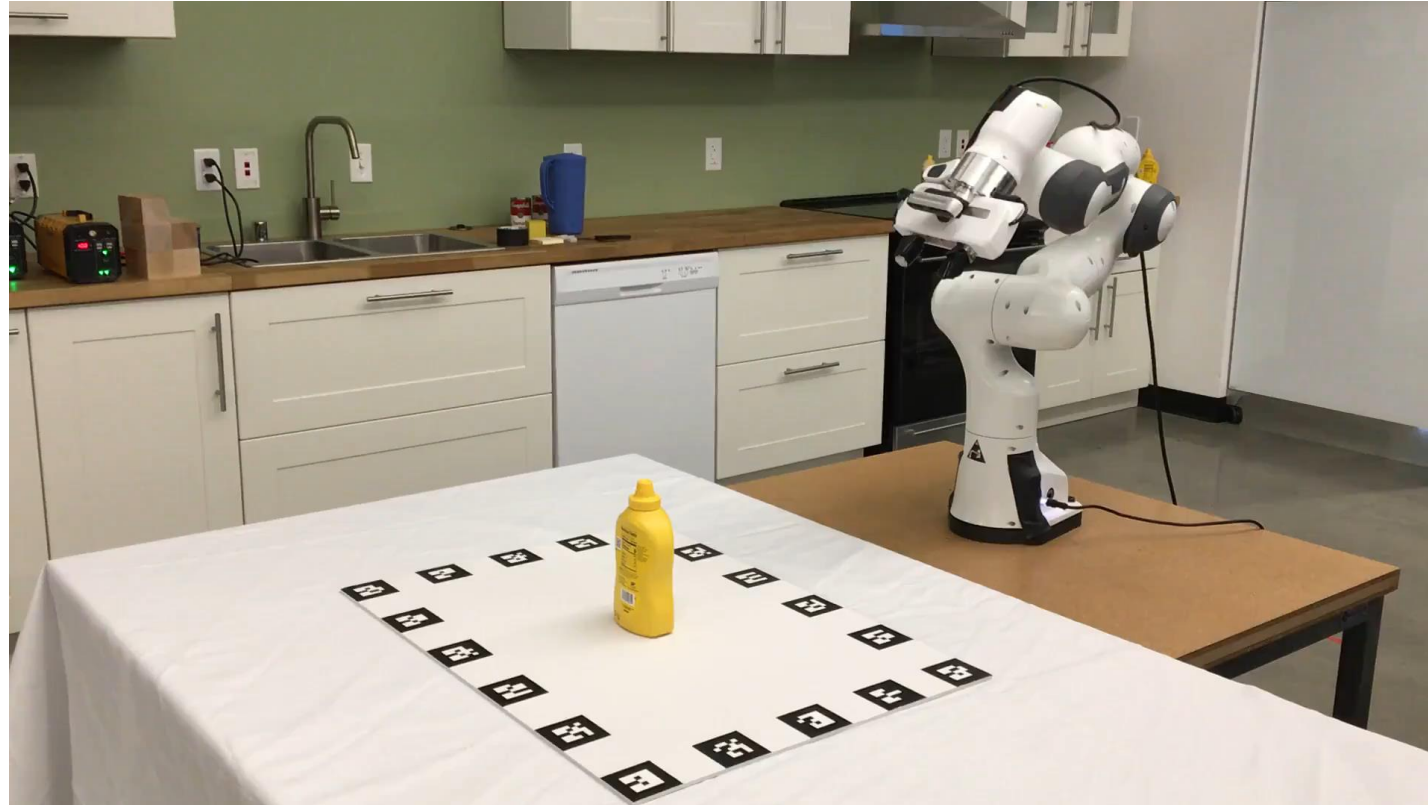


# Robot Mechanisms

- Links and Joints

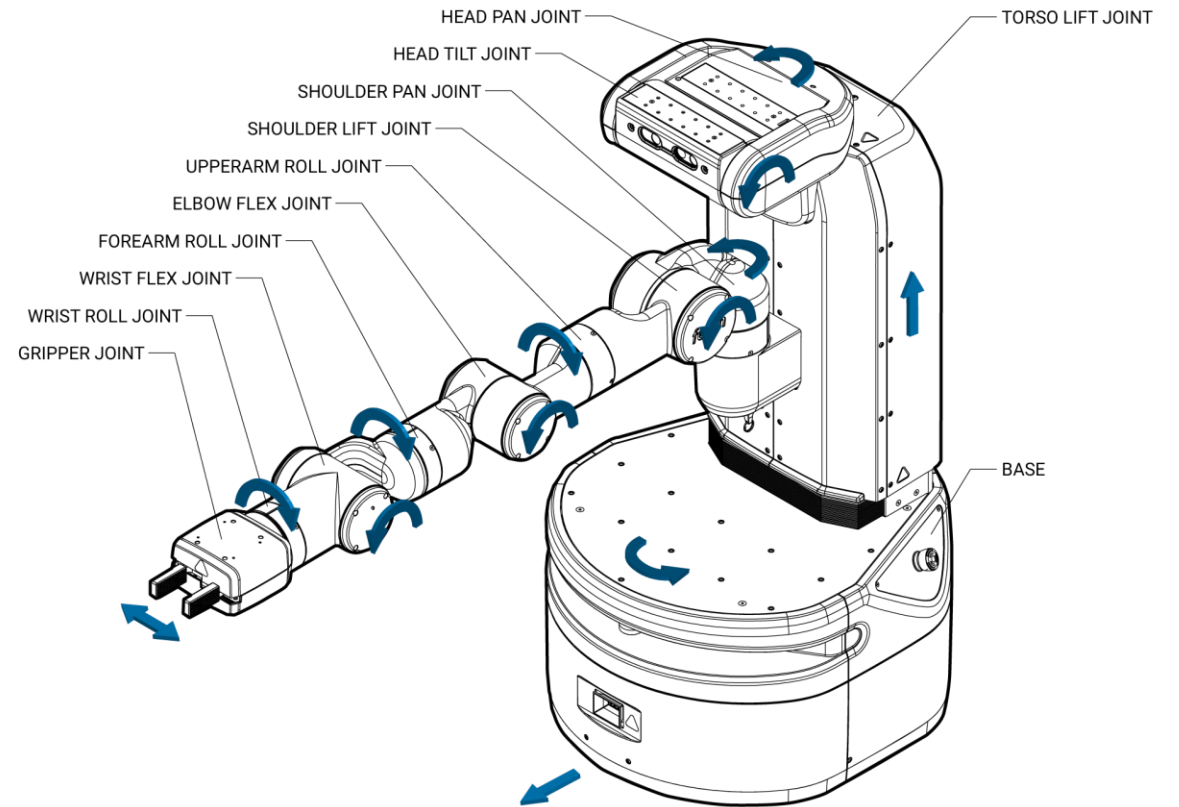



Fetch Mobile Manipulator

# Fetch Movement



# Robot Mechanisms



- Links and Joints

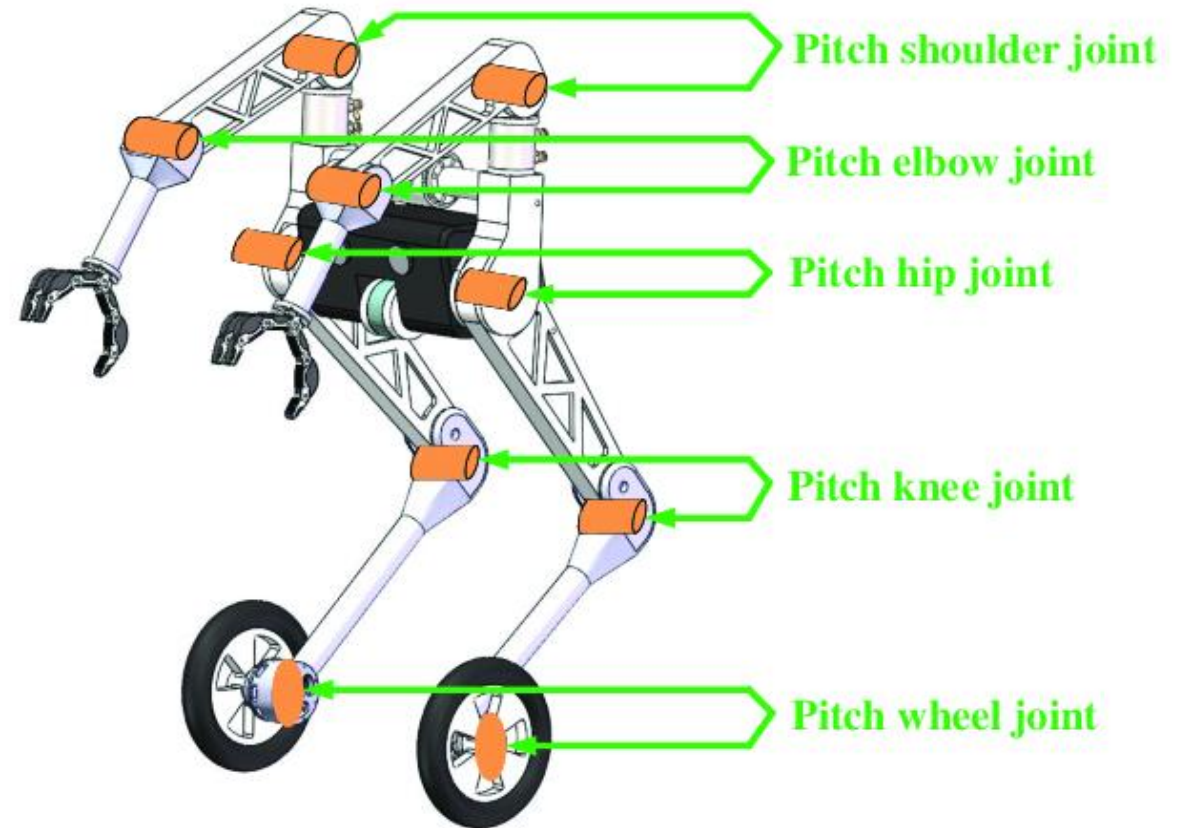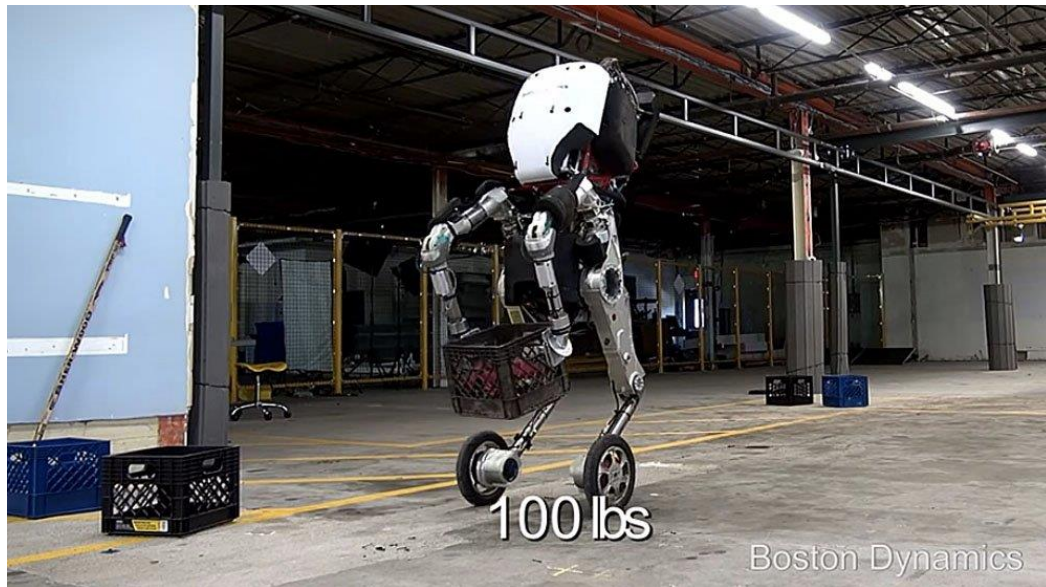

<https://thenewstack.io/boston-dynamics-agile-wheel-legged-humanoid-robot-performs-incredible-stunts/>

# Robot Joints

- Every joint connects exactly two links
- Revolute joint (R)
  - Hinge joint
  - Allows rotation motion about the joint axis

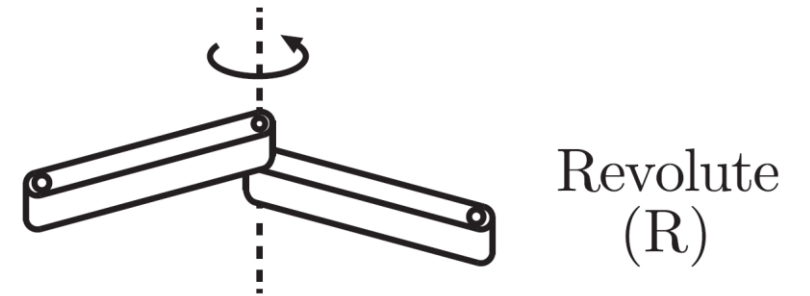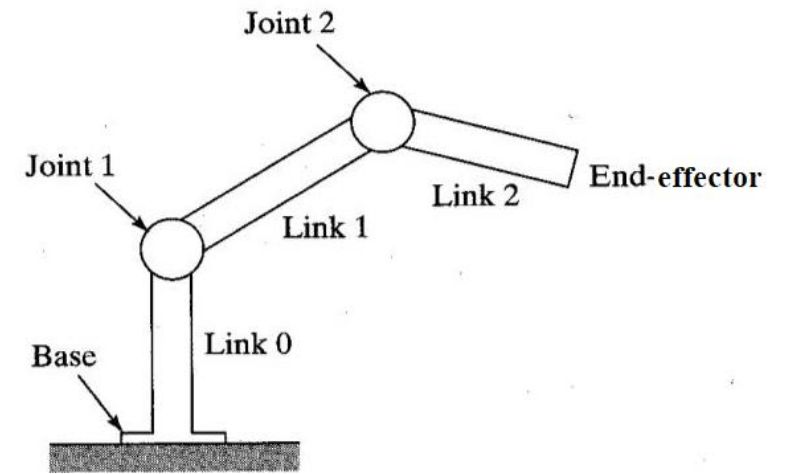




# Robot Joints

- Prismatic Joint (P)


- Sliding joint or linear joint
- Allows translational motion along the direction of the joint axis

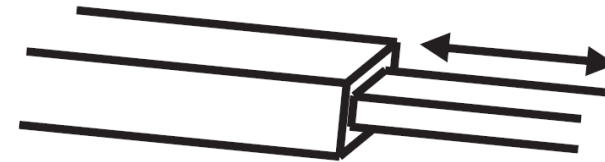


Prismatic  
(P)

- Helical Joint (H)

- Screw joint
- Allows rotation and translation about a screw axis

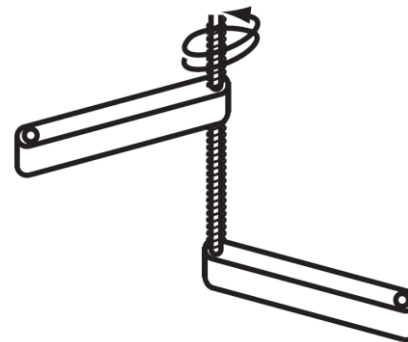


Helical  
(H)

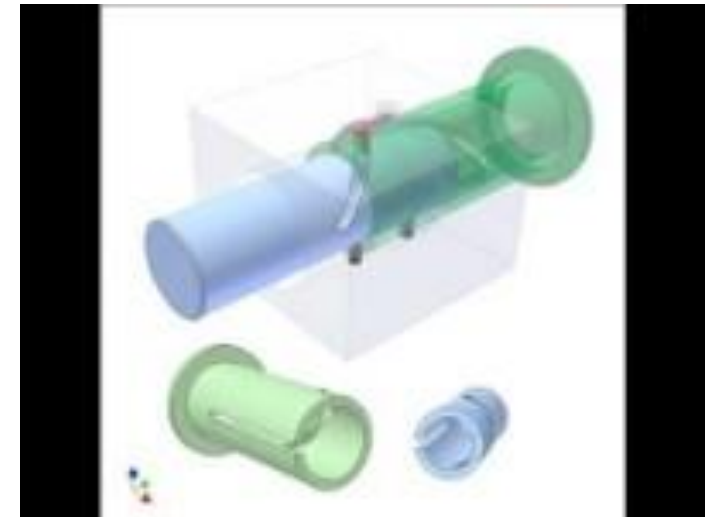


# Robot Joints


- Cylindrical joint (C)
  - Allows independent translations and rotations about a single fixed joint axis
- Universal joint (U)
  - A pair of revolute joints with orthogonal joint axes

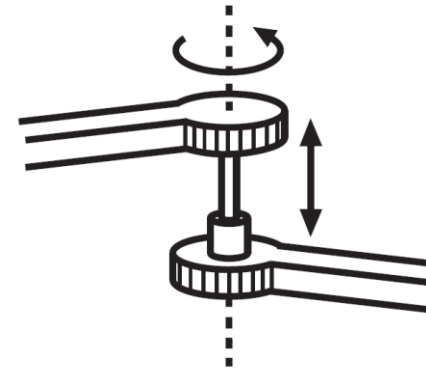

Cylindrical  
(C)

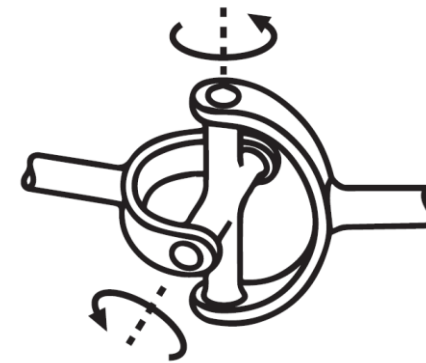


Universal  
(U)

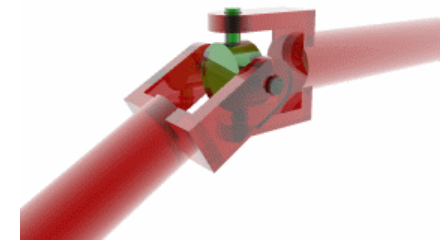

# Robot Joints

- Spherical joint (S)
  - Ball-and-socket joint

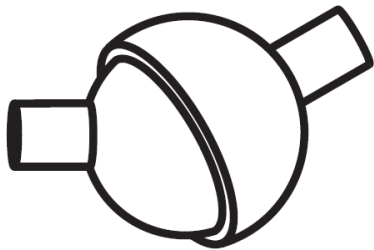


Spherical  
(S)




<https://youtu.be/kztZu3uTyvM>

# Robot Joints


- **Every joint connects exactly two links**

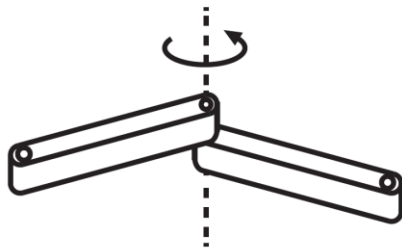


Revolute  
(R)




Cylindrical  
(C)




Prismatic  
(P)



Universal  
(U)

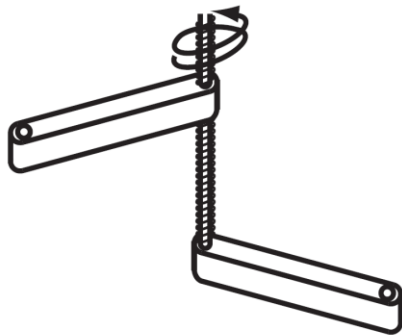





Helical  
(H)



Spherical  
(S)


# Degrees of Freedom

- Maximum number of logically independent values
- Specify the position of a rigid body

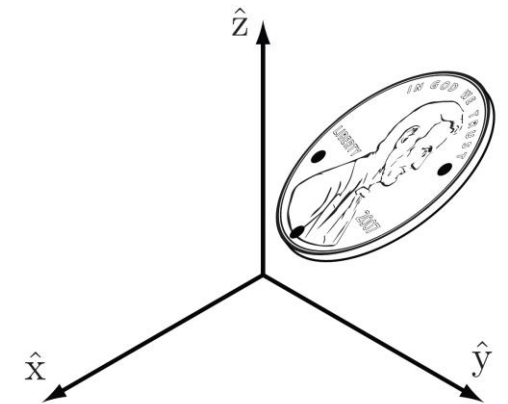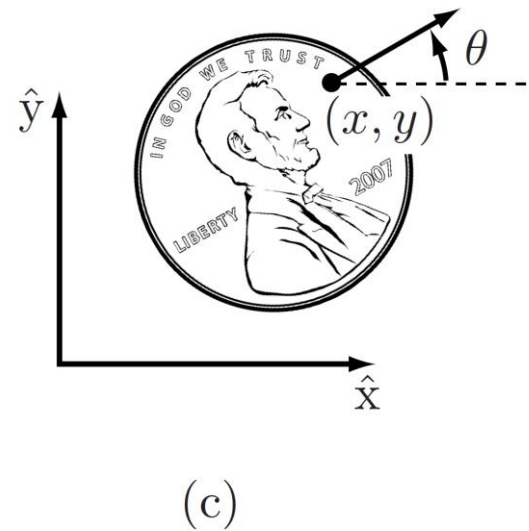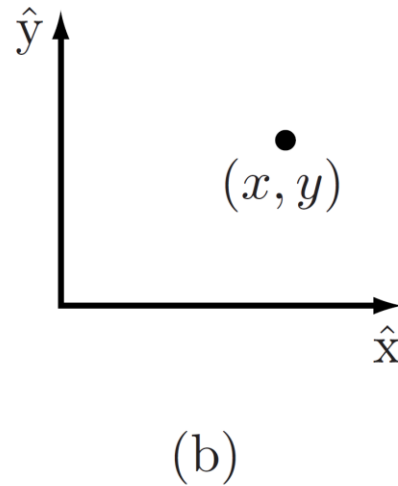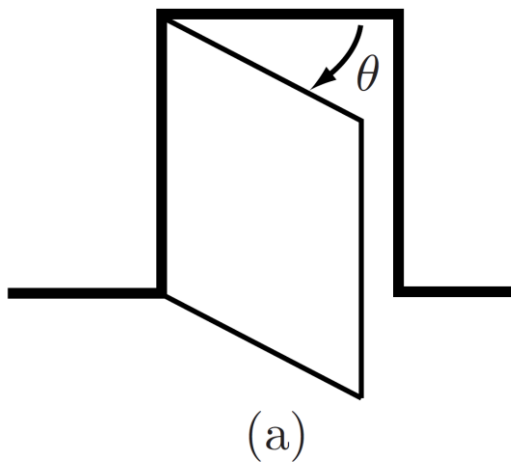

# Degrees of Freedom of Robot Joints


- Revolute joint
  - 1 DOF
- Prismatic joint
  - 1 DOF
- Helical joint
  - 1 DOF

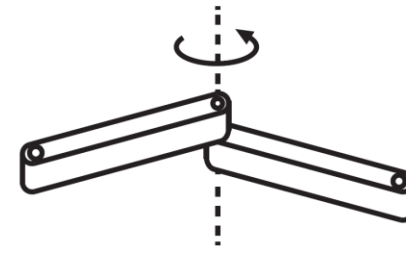

Revolute  
(R)




Prismatic  
(P)

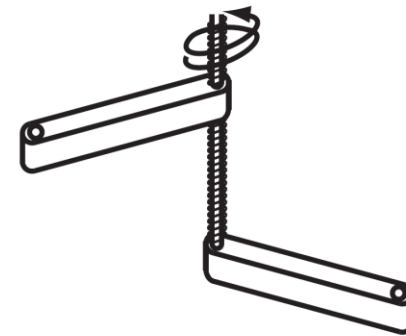

Helical  
(H)

# Degrees of Freedom of Robot Joints


- Cylindrical joint
  - 2 DOF
- Universal joint
  - 2 DOF
- Spherical joint
  - 3 DOF



Cylindrical  
(C)




Universal  
(U)



Spherical  
(S)


# Degrees of Freedom of Robot Joints




Revolute (R)



Prismatic (P)




Helical (H)



Cylindrical (C)



Universal (U)




Spherical (S)


Joint type	dof $f$	Constraints $c$ between two planar rigid bodies	Constraints $c$ between two spatial rigid bodies
Revolute (R)	1	2	5
Prismatic (P)	1	2	5
Helical (H)	1	N/A	5
Cylindrical (C)	2	N/A	4
Universal (U)	2	N/A	4
Spherical (S)	3	N/A	3



# Degrees of Freedom of a Robot

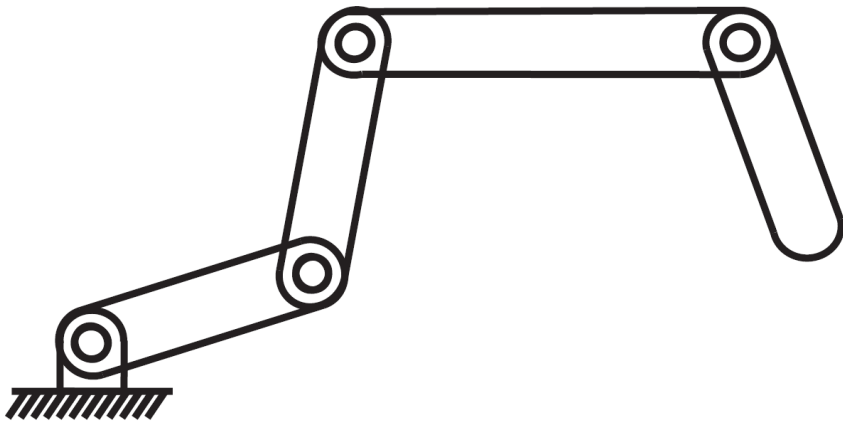


- 4 revolute joints
- 4 DOFs

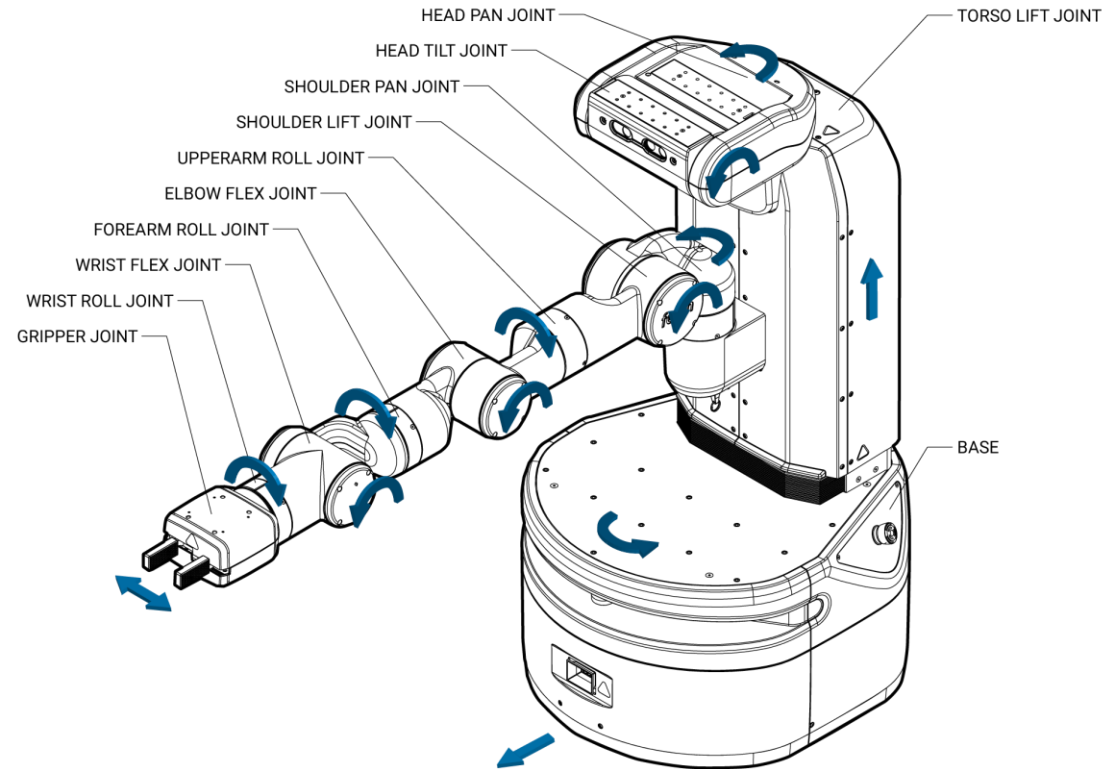

- 7 revolute joints for the arm
- 7 DOFs

# Configuration Space of a Robot

- The configuration of a robot is a complete specification of the position of every point of the robot.
- The minimum number  $n$  of real-valued coordinates needed to represent the configuration is the number of degrees of freedom (DOF) of the robot.
- The  $n$ -dimensional space containing all possible configurations of the robot is called the configuration space (C-space).
- The configuration of a robot is represented by a point in its C-space.

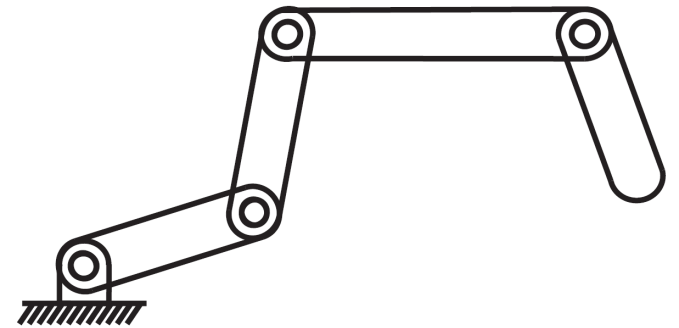


- 4 revolute joints
- 4 DOFs

$$\mathbf{q} \in \mathbb{R}^4$$

# Configuration Space of a Robot

- The configuration space of the Fetch arm is a 7D space
- Each value in the 7D vector indicates the value of the revolute joint

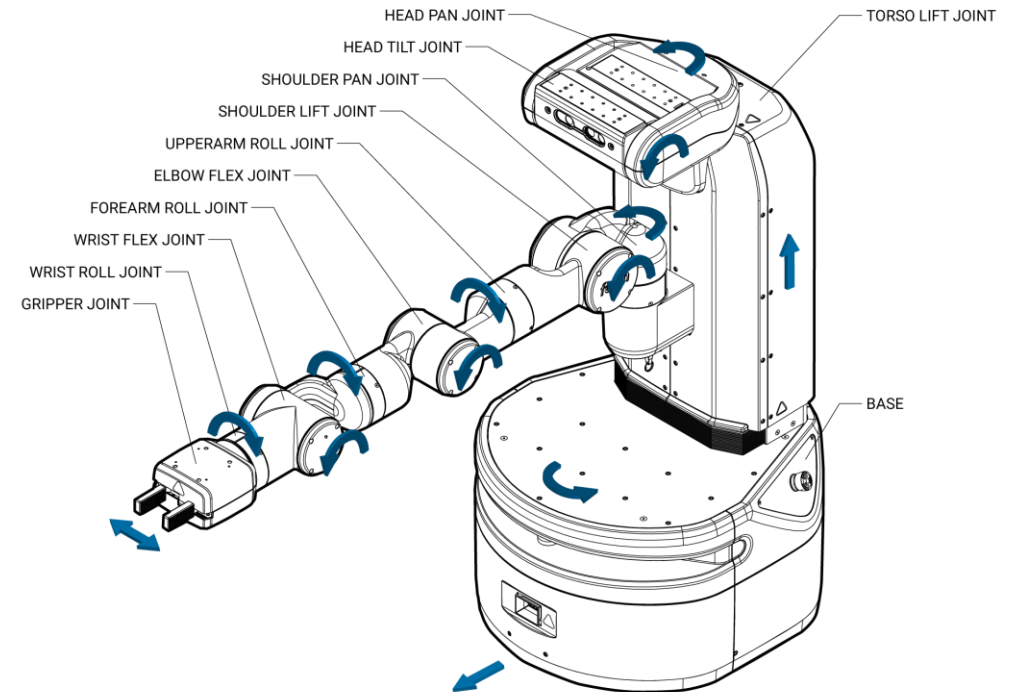

# Grübler's Formula

- The number of degrees of freedom of a mechanism with links and joints can be calculated using Grübler's formula

$$\text{degrees of freedom} = (\text{sum of freedoms of the bodies}) - (\text{number of independent constraints})$$

- Consider the following setting
  - A robot with  $N$  links,  $J$  joints (consider ground as one link)
  - Each link has  $m$  DOF (planar link? spatial link?)
  - Number of freedoms by joint  $i$   $f_i$
  - Number of constraints by joint  $i$   $c_i$

$$f_i + c_i = m$$

# Grübler's Formula


$$\text{dof} = \underbrace{m(N - 1)}_{\text{rigid body freedoms}} - \underbrace{\sum_{i=1}^J c_i}_{\text{joint constraints}} \quad \text{Ground is regarded as a link}$$

$$= m(N - 1) - \sum_{i=1}^J (m - f_i)$$

$$= m(N - 1 - J) + \sum_{i=1}^J f_i.$$

Assume all joint constraints are independent.

# Grübler's Formula

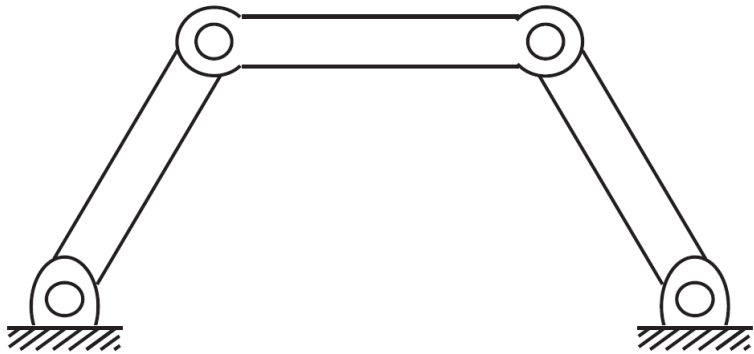


The planar four-bar linkage

- How many links?
  - 4 (one is ground)
- Each link has  $m$  DOF. What is  $m$ ?
  - $m=3$

$$\begin{aligned} \text{DOF} &= m(N - 1 - J) + \sum_{i=1}^J f_i \\ &= 3(4 - 1 - 4) + \sum_{i=1}^4 1 \end{aligned}$$

# Grübler's Formula

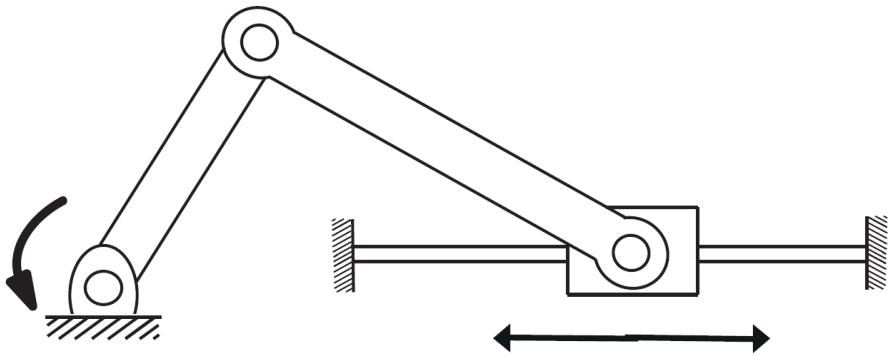


Slider-crank mechanism  
(planar)

- How many links?
  - 4 (one is ground)
- Each link has  $m$  DOF. What is  $m$ ?
  - $m=3$
- How many joints?
  - 3 revolute joints, 1 prismatic joint

$$\begin{aligned} \text{DOF} &= m(N - 1 - J) + \sum_{i=1}^J f_i \\ &= 3(4 - 1 - 4) + \sum_{i=1}^4 1 \end{aligned}$$

# Grübler's Formula

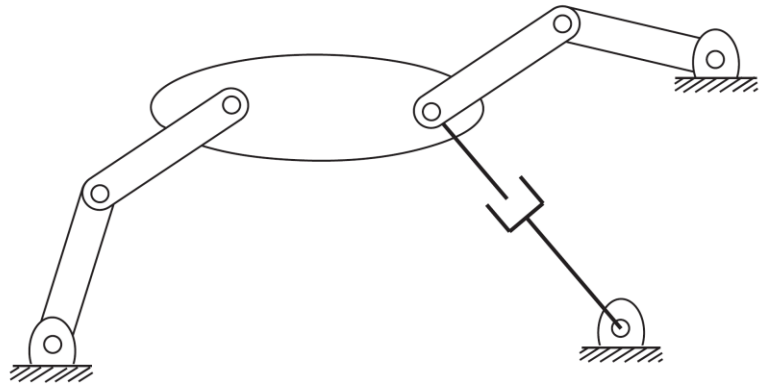

A planar mechanism with two overlapping joints

- How many links?
  - 8 (one is ground)
- Each link has  $m$  DOF. What is  $m$ ?
  - $m=3$
- How many joints?
  - 8 revolute joints, 1 prismatic joint



$$\text{dof} = 3(8 - 1 - 9) + 9(1) = 3$$

Read more examples in the textbook Lynch & Park



# Open-Chain vs. Closed-Chain

- Open-chain mechanisms: without a closed loop
- Closed-chain mechanisms: with a closed loop
- Examples
  - A person standing with both feet

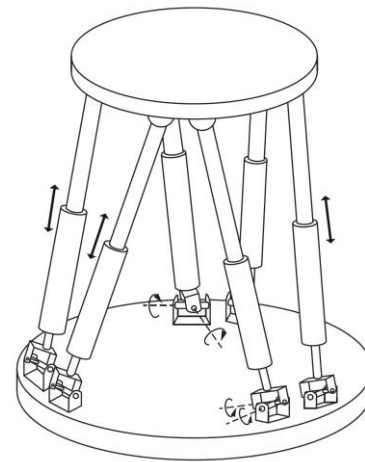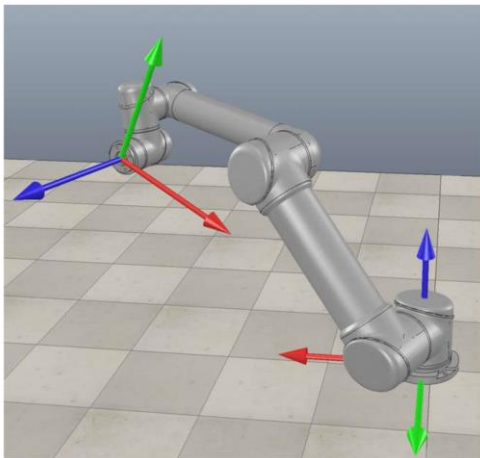

Stewart-Gough platform

# Summary

- Robot links and joints
- Degrees of freedom of joints and robots
- Grübler's Formula
- Configuration space

# Further Reading

- Chapter 2 in Kevin M. Lynch and Frank C. Park. Modern Robotics: Mechanics, Planning, and Control. 1st Edition, 2017  
<http://hades.mech.northwestern.edu/images/7/7f/MR.pdf>
- T. Lozano-Perez. Spatial planning: a configuration space approach. A.I. Memo 605, MIT Artificial Intelligence Laboratory, 1980.  
<http://people.csail.mit.edu/tlp/>
- W. M. Boothby. An Introduction to Differentiable Manifolds and Riemannian Geometry. Academic Press, 2002.